




RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

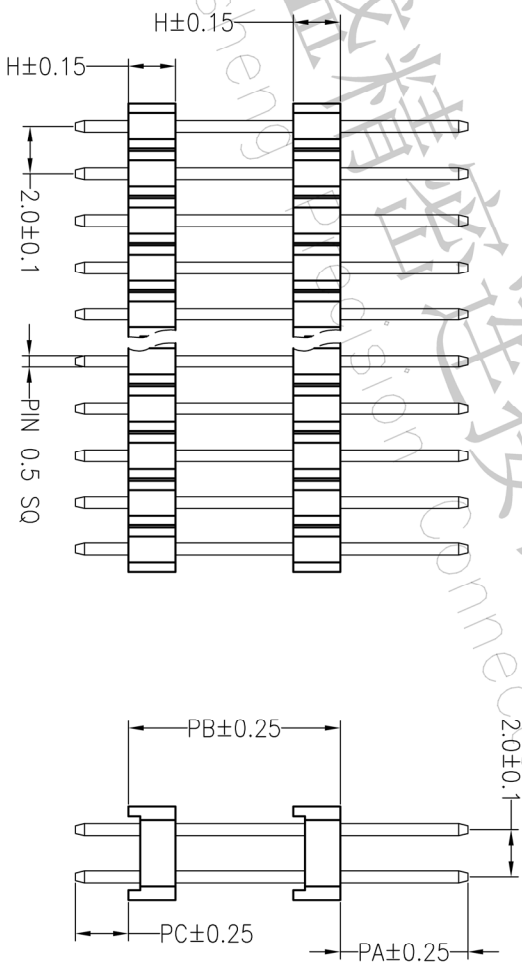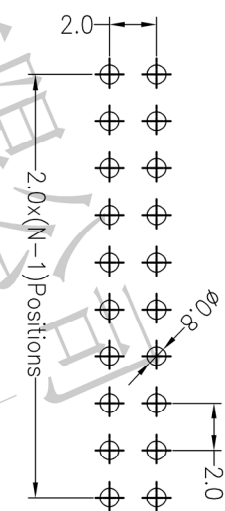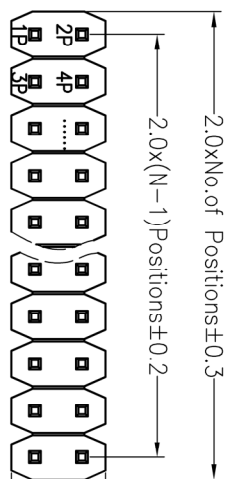

Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
产品类别	间距	额定高度	排数	单排PIN数	产品形态	绝缘材料	电镀厚度	包装方式
P=插针	1=1.27	A=1.0	1=单排	1-40P	1=0P	1=PBT	00=薄型	1=管装
	2=2.0	B=1.5	2=双排	2=9A	2=9A	2=LCP	01=1.0"	2=盘装
	3=3.0	C=2.0		3=9A	3=PPS	3=PPS	02=2.0"	3=盘装
	4=4.0	D=2.5		4=PA6	4=PA6	4=PA6	03=3.0"	4=盘装
	5=5.0			5=PA6T	5=PA6T	5=PA6T	04=4.0"	5=盘装
	A=1.27~2.54							

Dimension orfitness list						
ITEM	PA	PB	PC	L	H	W
001	3.90	5.30	2.80	12.0	2.0	4.0
Alternate						



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm		A4	2.0PH 2XNP 双塑 180度 L=12	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			APPROVE		PROJ.			
Angle	±3°								
DIM	TOL								
1	2	3	4	5	6	7	8	9	