


RoHS




SPECIFICATIONS

Rated Current: 1.5AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

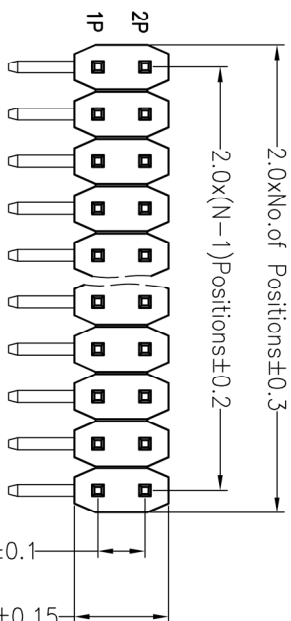

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

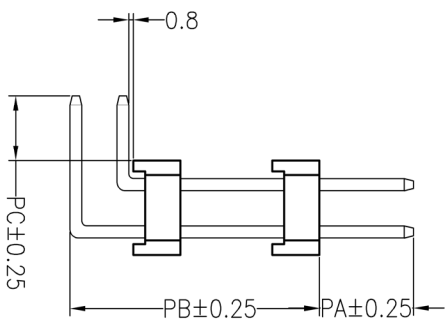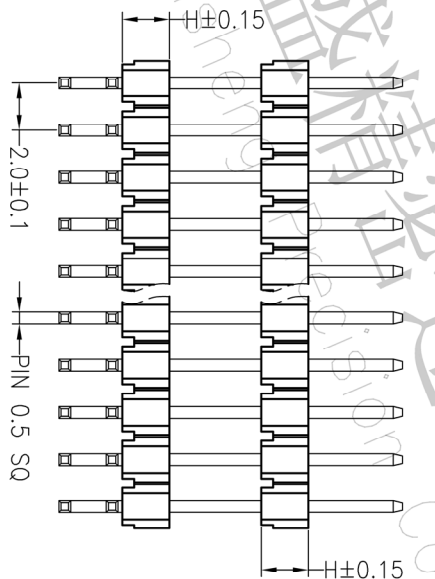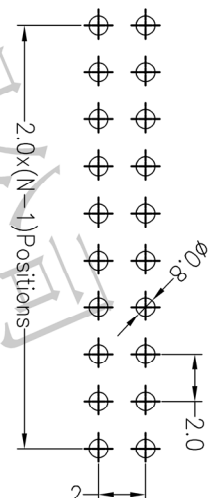

Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
产品类别	间距	接触高度	排数	单排孔数	产品形态	绝缘材料	电镀厚度	包装方式
P=插针	1=1.27	A=1.0	1=1排	1=4P	1=DIP	1=PBT	00=常规	1=管装
	2=2.0	B=1.5	2=2排	1~4P	2=90°	2=LCP	01=1μ"	2=卷装
	2=2.54	C=2.0			3=SM	3=PPS	02=2μ"	3=散装
	5=1.0	D=2.5			4=PA6	4=PA6	03=3μ"	4=散数
	4=1.27+2.54				5=PA6T	5=PA6T		5=散数

Dimension or thickness list		W	
ITEM	PA	PB	PC
001	4.00	7.50	3.00
			13.50
			17.50
			2.0
			4.0

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.	◆			TITLE:	2.0PH 2XNP 双塑 90度
DIM	TOL								