

RoHS

SPECIFICATIONS


Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)


Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
---	---	---	---	----	---	----	---	------

产品类别: 间距: 塑胶壳体: 公差: 单排/双排: 产品形态: 塑胶材料: 电镀厚度: 包装方式: 序号号
 P-排针 1=1.27 A=1.0 1=单排 1=40P 1=DIP 1=PBT 00=常规 1=管装
 2=2.54 B=1.5 2=双排 2=80P 2=SOI 01=14° 2=管装
 4=3.96 D=2.0 4=SH 3=PRS 02=20° 3=管装
 5=1.0 5=1.0 5=机械脚 5=PA6 03=30° 4=袋装
 A=1.27*2.54 A=1.27*2.54 3=PA6T 5=管装

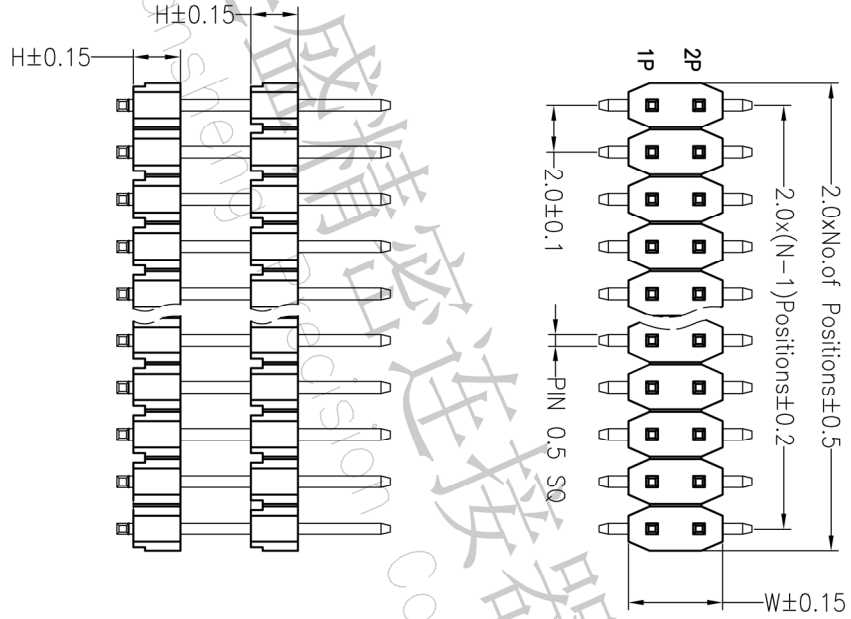

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

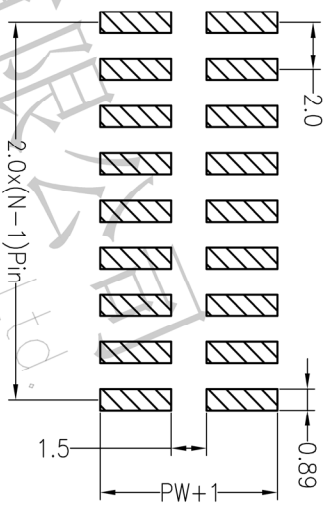

Dimension orfitness list						
ITEM	PA	PB	PW	PD	L	H
001	3.00	10.0	6.50	0.10	14.7	2.0
Alternate						4.0


 深圳市连盛精密连接器有限公司
 Shenzhen Liancheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.				TITLE:	2.0PH 2XNP 双塑 SMT 总高13
DIM	TOL								

1 2 3 4 5 6 7 8 9