





# RoHS

## SPECIFICATIONS

Rated Current: 1.5AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PA6T  
 Max. Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

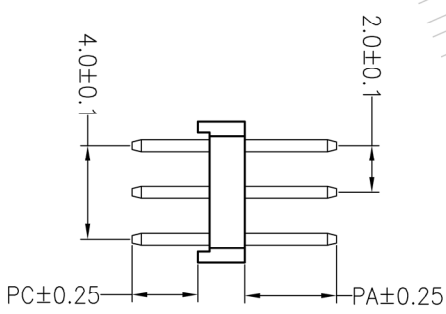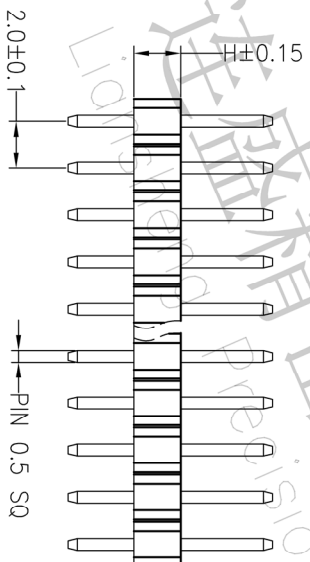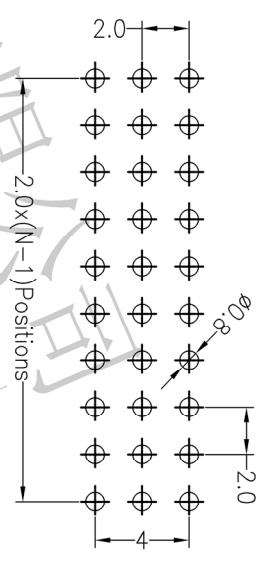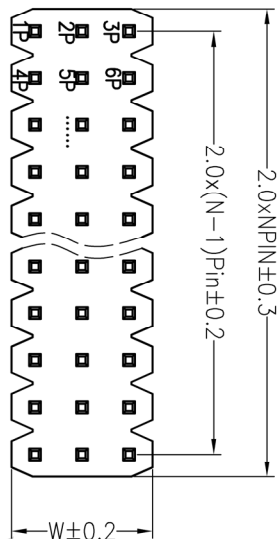

## Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
产品类型	间距	塑胶壳体	绝缘	单排PIN数	产品形态	塑胶材料	电镀厚度	包装方式
P-排针	1=1.27 2=2.0 3=2.54 5=1.96 A=1.27*2.54	A=10 B=15 C=20 D=25	1=单排 2=双排 3=三排 4=四排	1~4P	1=DIP 2=PA 3=SMT 5=贴片	1=PBT 2=PC 3=PPS 4=PA66 5=PA6T	0=雾面 01=10μ 02=20μ 03=30μ	1=管装 2=卷装 3=散装 4=盒装
								序号

ITEM	PA	PB	PW	PC	L	H	W
001	3.90		2.80	8.70		2.0	6.0
Alternate							

**深圳市连盛精密连接器有限公司**  
 Shenzhen LianSheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE		DATE		MODIFICATION DESCRIPTION		DATE		REV	
4		2012.04.11		NEW DRAWING				A0	
3									
2									
1									

2.0PH 3XNP 180度