
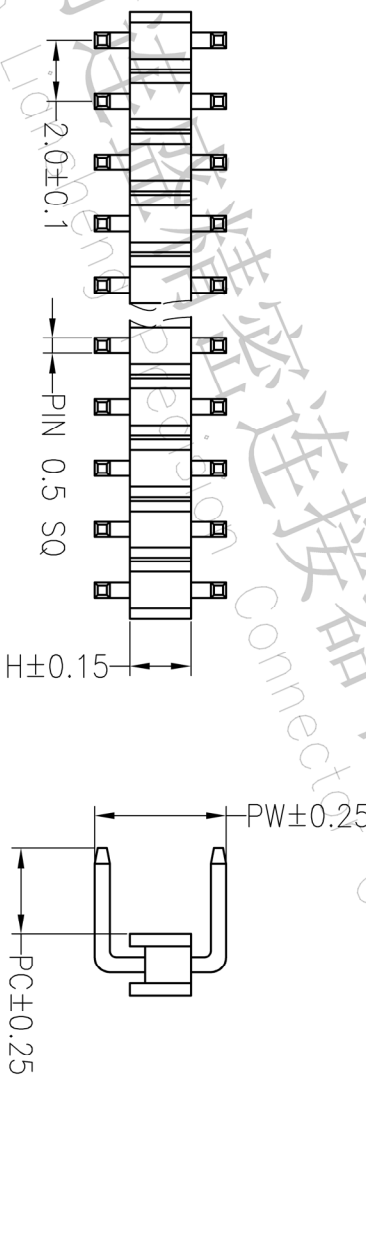


# RoHS

## SPECIFICATIONS

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c  
 Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

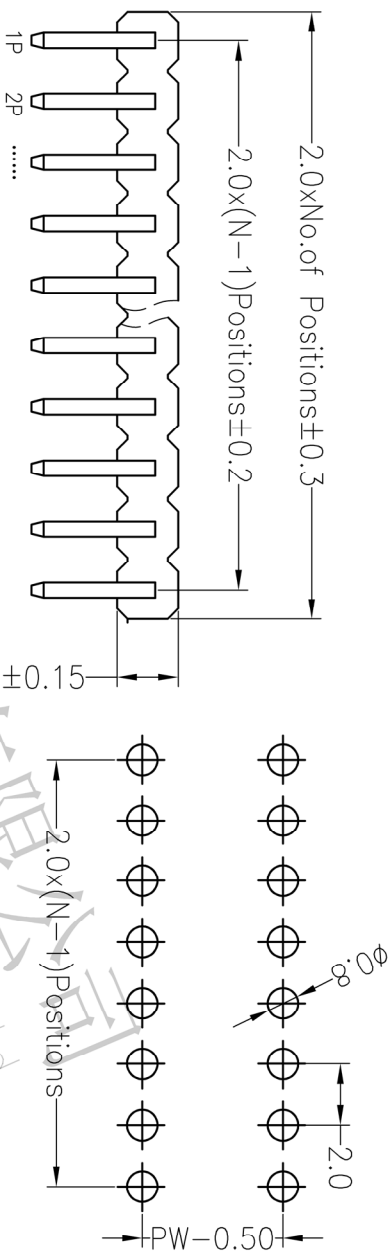

## Ordering Information

P	X	X	X	XX	X	X	XX	X	XXXX
产品类型	间距	塑胶高度	排数	单排PIN数	产品形态	塑胶材料	绝缘厚度	包装方式	序列号
P=排针	1=1.27	A=1.0	1=单排	1=40P	1=DP	1=PBT	00=常规	1=管装	
	2=2.0	B=1.5	2=双排		2=RA	2=LCP	01=1u"	2=卷装	
	3=2.54	C=2.0	3=三排		3=SM	3=PPS	02=2u"	3=盘装	
	4=3.96	D=2.5	4=四排		4=SH	4=PA46	03=3u"	4=袋装	
	5=1.0				5=硅胶脚	5=PA6T		5=盘装	
	A=1.27±0.54					9=PA9T			

注:塑胶居中

Dimension antitheses list									
ITEM	PA	PW	PC	L1	L2	L3	H	W	
001		5.50	2.70	12.00			2.0	2.0	
Alternate									



深圳市连盛精密连接器有限公司  
 Shenzhen LianSheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.XX	±0.20	UNIT	mm	SIZE	A4	TITLE:	
X.XXX	±0.10	Angle	±3°	CHECK		SHEET	1/1	2.OPH 1XNP 蜈蚣脚	
REV	DATE	MODIFICATION DESCRIPTION		APPROVE		PROJ.			
1									