


ROHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c
 Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

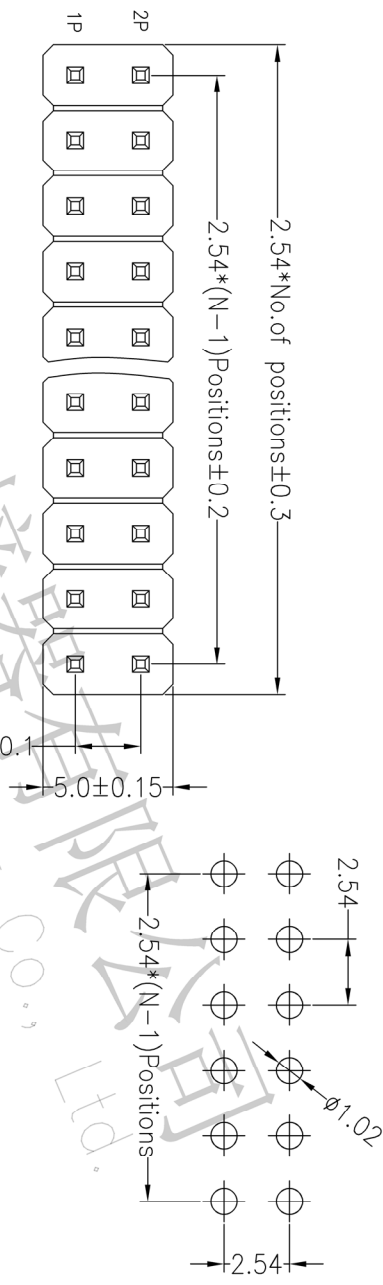


Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

P X X X X XX X X XX X X XXXX

产品型号 间距 塑胶高度 插数 单脚PIN数 产品形态 塑胶材料 电镀厚度 包装方式 序号号
 P=排针 1+1.27 A=1.0 1=单排 1=DIP 1=PBT 0=常规 1=管装
 2+2.0 B=1.5 2=双排 2=HA 2=LCP 01=1U" 2=盘装
 3+2.54 C=2.0 3=三排 3=SM 3=PPS 02=2U" 3=盘装
 4+3.0 D=2.5 4=四排 4=PA46 03=3U" 4=袋装
 5+1.0 5=五排 5=PA6T 9=PA9T 5=盒装
 A+1.27*4.54

Dimension antitheses list				
ITEM	PA	PC	L	
Alternote	11.70	3.00	16.20	



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.30	UNIT	mm	1/1	A4	TITLE:	
X.XX	±0.20	CHECK		SIZE	A4	1/1		2.54PH H1.5mm 2XNP PA11.7	
X.XXX	±0.10			SHEET				PC3.0	
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---