





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c
 Contact Material:Brass
 Contact Plating:Au Or Tin Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

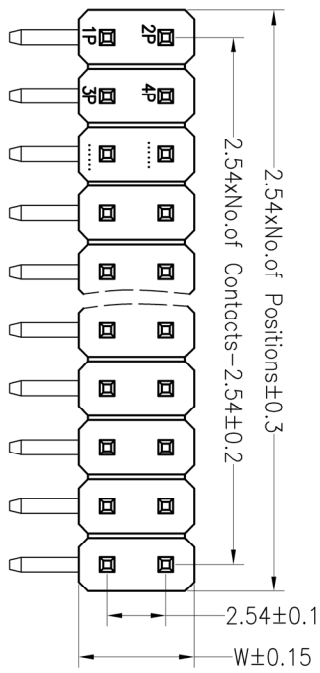

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

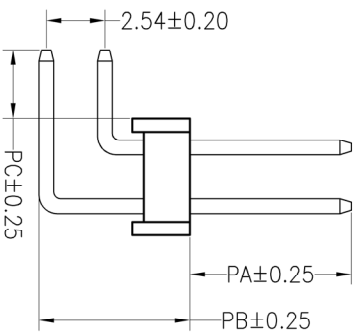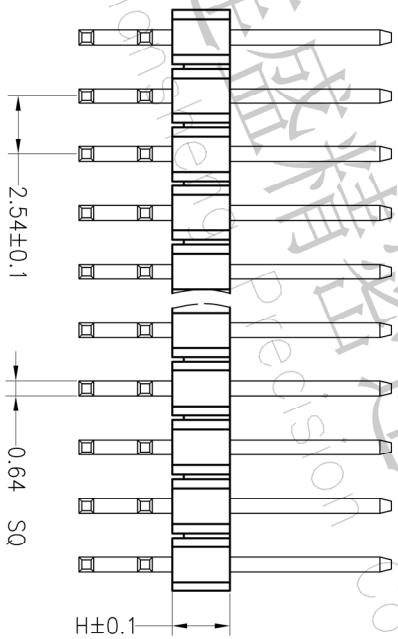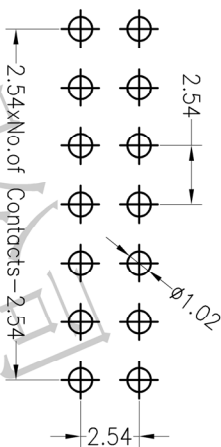

Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
产品类型	间距	塑胶高度	排数	单排间距	产品形态	绝缘材料	电镀厚度	包装方式
P-排数	1-1.27	A=1.0	1-4排	1-40P	1-DIP	1-PA6T	00-常规	1-管装
	2-2.54	B=1.5	2-4排	1-40P	2-SIP	2-PA6T	01-1u"	2-盒装
	3-3.81	C=2.0	3-4排	1-40P	3-SIP	3-PA6T	02-2u"	3-盒装
	4-5.08	D=2.5	4-排	1-40P	4-PA6T	4-PA6T	03-3u"	4-袋装
	5-1.0			1-40P	5-PA6T	5-PA6T	04-5u"	5-盒装
	A=1.27x2.54							

ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.00	6.90	3.00	13.80	18.80		2.5	5.0

Dimension unit:mm list



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			SIZE A4	
X.XX	±0.20	CHECK		SHEET		1/1		SHEET	
X.XXX	±0.10			APPROVE				PROJ.	
Angle	±3°							TITLE:	
DIM	TOL							2.54PH 2XNP 90度	

1 2 3 4 5 6 7 8 9