

RoHS

SPECIFICATIONS







Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Or Tin Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

P	X	X	X	XX	X	X	XX	X	XXXX
产品类型	间距	塑胶高度	排数	单排PIN数	产品形态	塑胶材料	电镀厚度	包装方式	序列号
P-排针	1=1.27 2=2.0 3=2.54 4=3.96 A=1.27*2.54	A=1.0 B=1.5 C=2.0 D=2.5	1=单排 2=双排 3=三排 4=四排	1-40P	1-DIP 2-RA 3-SMT 4-SH 5=引脚	1=PBT 2=LCP 3=PPS 4=PA6 5=PA6T 9=PA9T	0=常规 0.1=1u" 0.2=2u" 0.3=3u"	1-管装 2-盘装 3-袋装 4-袋装 5-盘装	

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

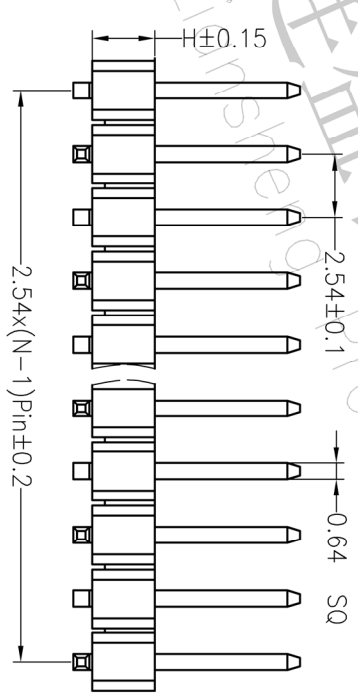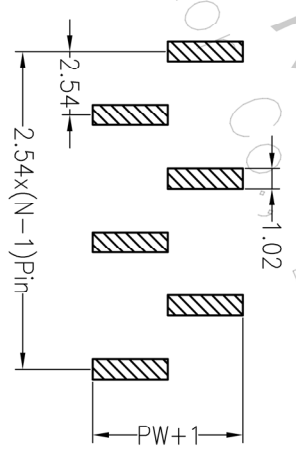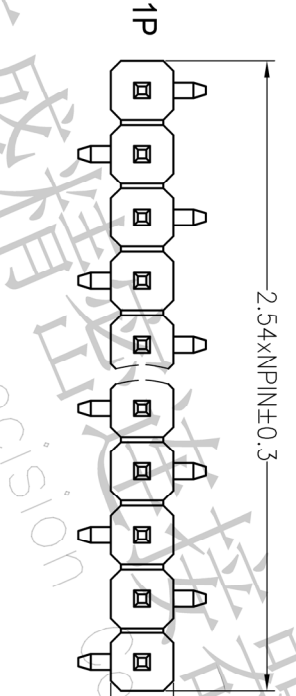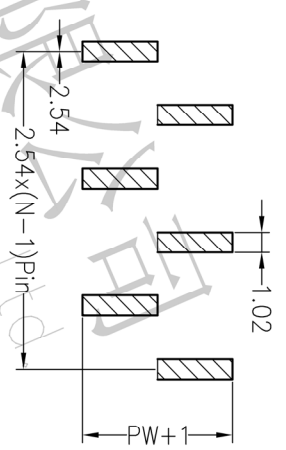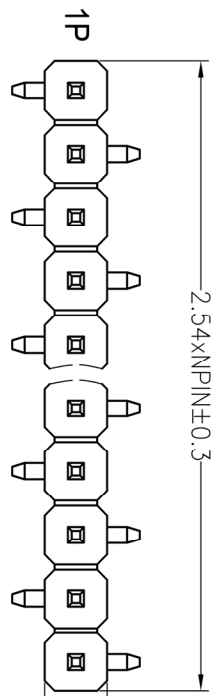

ITEM	PA	PB	PW	L1	L2	L3	H	W
001	6.00	3.20	5.00	11.00			2.5	2.5
Alternate								

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			A4	
X.XX	±0.20	CHECK		SIZE				1/1	
X.XXX	±0.10			SHEET					
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE		APPROVE		TITLE:		2.54PH 1XNP SMT			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	TITLE:	2.54PH 1XNP SMT			
A0	2012.03.28	NEW DRAWING							
1									