





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

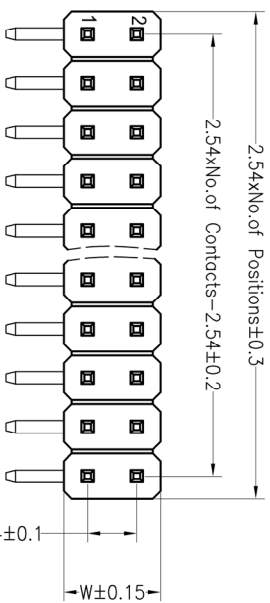

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE ±0.05)

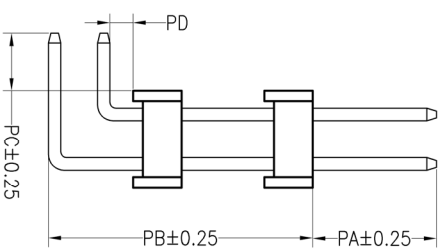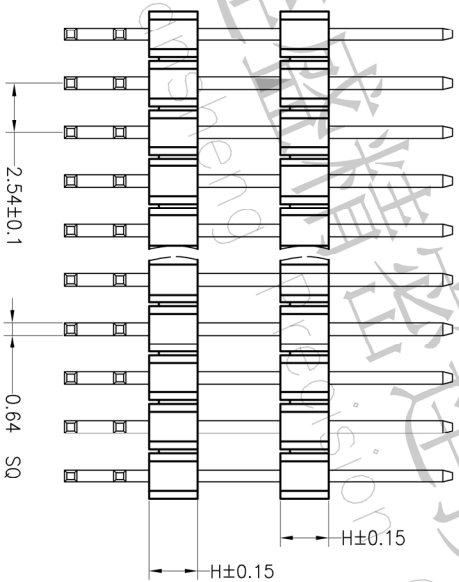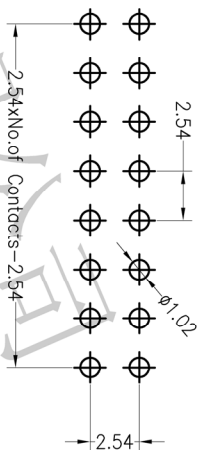

Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
产品类型	间距	额定电流	接触材料	绝缘材料	电鍍厚度	包裝方式	序列号	
P-插針	1=1.27	A=1.0	1=PA6T	00=卷板	1=管裝	1=管裝		
	2=2.54	B=1.5	2=PA6	01=1"	2=卷裝	2=卷裝		
	3=4.38	C=2.0	3=SN1	02=1.5"	3=管裝	3=管裝		
	4=4.38	D=2.5	4=SN1	03=2"	4=管裝	4=管裝		
	A=1.27/4.54		5=PA6T	04=3"	5=管裝	5=管裝		

Dimension omittenses list									
ITEM	PA	PB	PC	PD	L1	L2	H	W	
001	3.00	10.7	3.30	1.00	15.00	20.00	2.5	5.0	
Alternate									



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.X	±0.30	UNIT	mm	A4	1/1	254PH 2XNP 双塑 90度	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10	APPROVE		PROJ.		SHEET			
Angle	±3°					PROJ.			
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.03.28	NEW DRAWING	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---