

ROHS

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)

Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

P X X X X XX X X XX X XXX

产品选型
 P-插针
 1=1.27
 2=2.0
 3=2.54
 4=3.0
 5=1.0
 A=27-254

间距
 A=1.0
 B=1.5
 C=2.0
 D=2.5

排数
 1=单排
 2=双排
 3=三排
 4=四排

单排PIN数
 1-40P

产品形态
 1=DRP
 2=RP
 3=SR
 4=SR
 5=板级插





塑化材料
 1=PBT
 2=LCP
 3=PPS
 4=PA46
 5=PA6T
 9=PA9T

电镀厚度
 00=常规
 01=1μ"
 02=2μ"
 03=3μ"

包装方式
 1=整卷
 2=卷装
 3=盘装
 4=袋装
 5=盒装

序列号
 XXXXX

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

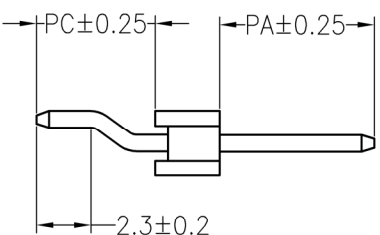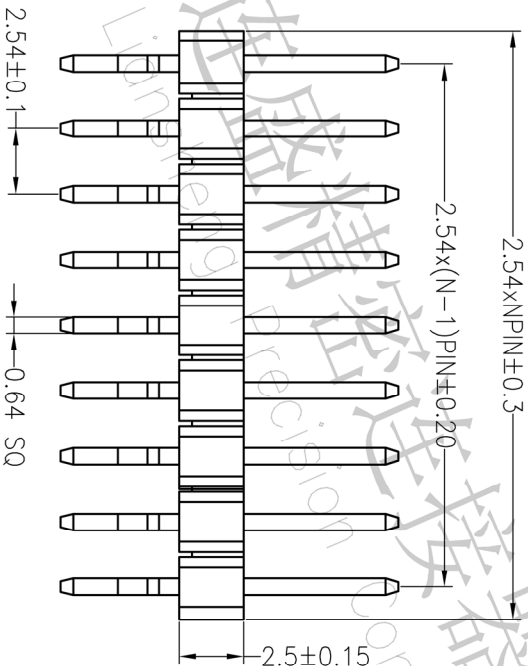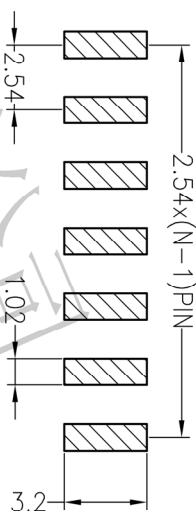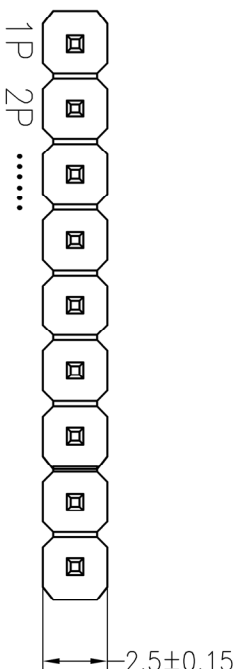

ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.00		4.80	13.5			2.5	2.50
Alternate								

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
A0	2012.03.28	NEW DRAWING		X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3° DIM TOL	CHECK APPROVE	UNIT mm SIZE A4 SHEET 1/1 PROJ.	1/1	2.54PH 1XNP	01-01

B

1	2	3	4	5	6	7	8	9

A

B

C

D

E

F

G