

ROHS

SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)

Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

P X X X X XX X X XX X XXXX

产品选型
 P-插针
 1=1.27
 2=2.54
 3=3.81
 4=5.08
 5=1.0
 A=27-2.54

间距
 A=1.0
 B=1.5
 C=2.0
 D=2.5

排数
 1=单排
 2=双排
 3=三排
 4=四排

单排PIN数
 1-40P

产品形态
 1=DP
 2=RP
 3=ST
 4=PPS
 5=板级插





组化材料
 1=PBT
 2=LCP
 3=PPS
 4=PA46
 9=PA6T

电镀厚度
 00=常规
 01=1u"
 02=2u"
 03=3u"

包装方式
 1=卷装
 2=盘装
 3=罐装
 4=袋装
 5=盒装

序列号
 XXXXX

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

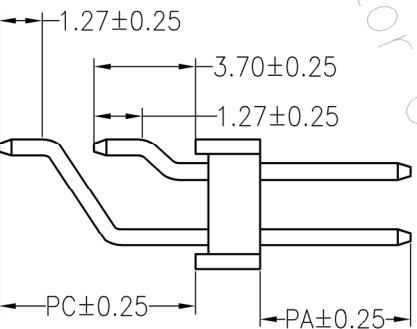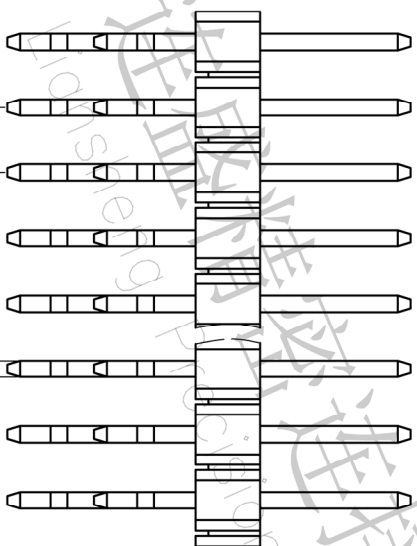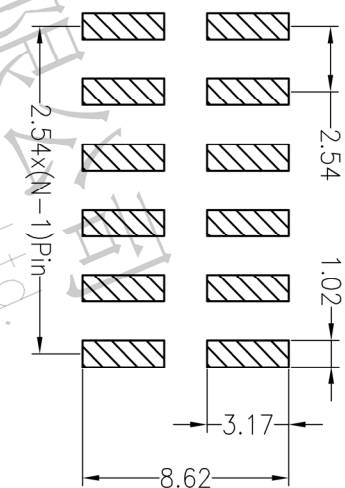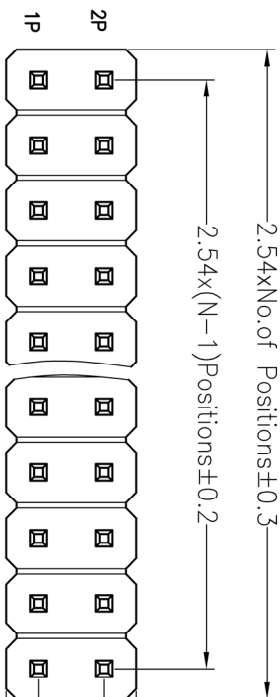

ITEM	PA	PB	PC	L1	L2	L3	H	W
001	6.00		8.50	12.5	19.0		2.5	5.0

Dimension antitheses list

Alternate	H	W
	2.5	5.0

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

A

REV	DATE	MODIFICATION DESCRIPTION
A0	2012.03.28	NEW DRAWING

B

1	2	3	4	5	6	7	8	9
OPERATION	DRAW	CHECK	APPROVE	SCALE	FIT	PART NO.	TITLE:	
X.X	±0.30			UNIT	mm			
X.XX	±0.20			SIZE	A4			
X.XXX	±0.10			SHEET	1/1			
Angle	±3°			PROJ.				
DIM	TOL							

A

B