

RoHS


SPECIFICATIONS

Rated Current:5.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: LCP

Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

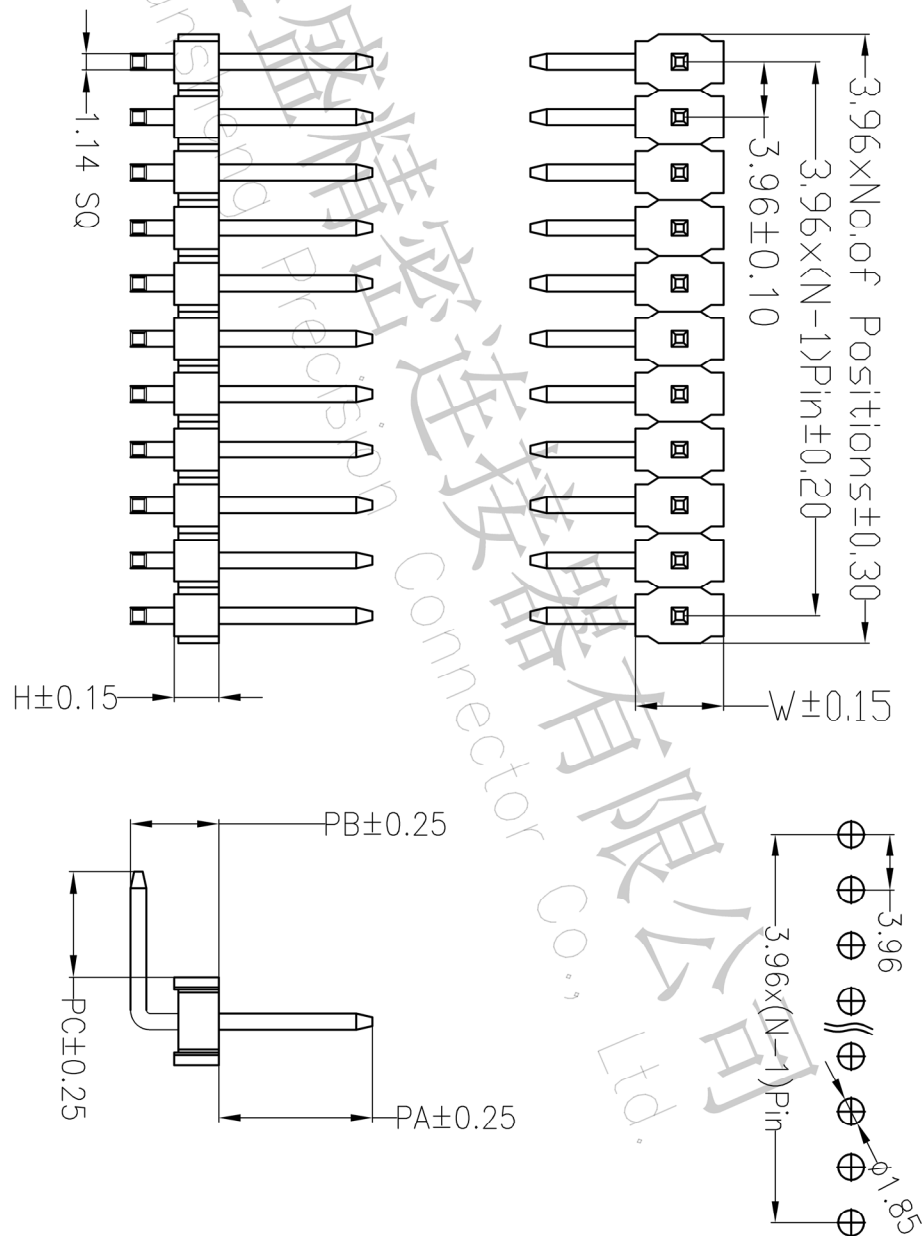

Ordering Information

P	X	X	X	XX	X	XX	X	XXXX
产品型号	插孔	插距	封装形式	产品形态	绝缘材料	电镀材料	电镀厚度	包封形式
1-1.27	A=1.0	1-1.27	1-4PBT	1-DIP	1-PCB	0.05-0.10	1-直插	1-直插
2-2.54	B=1.5	2-2.54	2-DIP	2-DIP	2-LCP	0.1-0.15	2-直插	2-直插
4-3.96	C=2.0	3-2.54	3-DIP	3-DIP	3-PPS	0.2-0.3	3-直插	3-直插
5-1.27-2.54	D=2.5	4-2.54	4-DIP	4-DIP	4-PPS	0.3-0.4	4-直插	4-直插
		5-2.54	5-DIP	5-DIP	5-PPS	0.4-0.5	5-直插	5-直插
			9-PBPT	9-PBPT	9-PPS	0.5-0.6	9-直插	9-直插

ITEM	PA	PB	PC	L1	L2	L3	H	W
001	8.00	5.50	3.50	19.0			3.2	6.3

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4				
X.XXX	±0.10			SHEET	1/1				
Angle	±3°	APPROVE		PROJ.					
DIM	TOL								
CHANGE									
MODIFICATION DESCRIPTION									
DATE									
REV									
A0	2012.04.11	NEW DRAWING							
1									

TITLE: 3.96PH 1XNP 90度