

ROHS

SPECIFICATIONS


Rated Current:5.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)

Standard: LCP
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Ordering Information

P	X	X	XX	X	XX	X	XXXX
产品类型	间距	排数	产品形式	产品材料	电镀厚度	包装形式	序列号
P=排数	A=1.0 B=1.27 C=2.0 D=2.5	2=两排 3=三排 4=四排	1=0P 2=1P 3=3MT 4=SH 5=连接器	1=PP 2=PP 3=PP 4=PA6 5=PA6T	0.0=0.0mm 0.05=0.05mm 0.08=0.08mm 0.1=0.1mm 0.15=0.15mm	1=管装 2=卷装 3=盒装 4=袋装 5=散装	

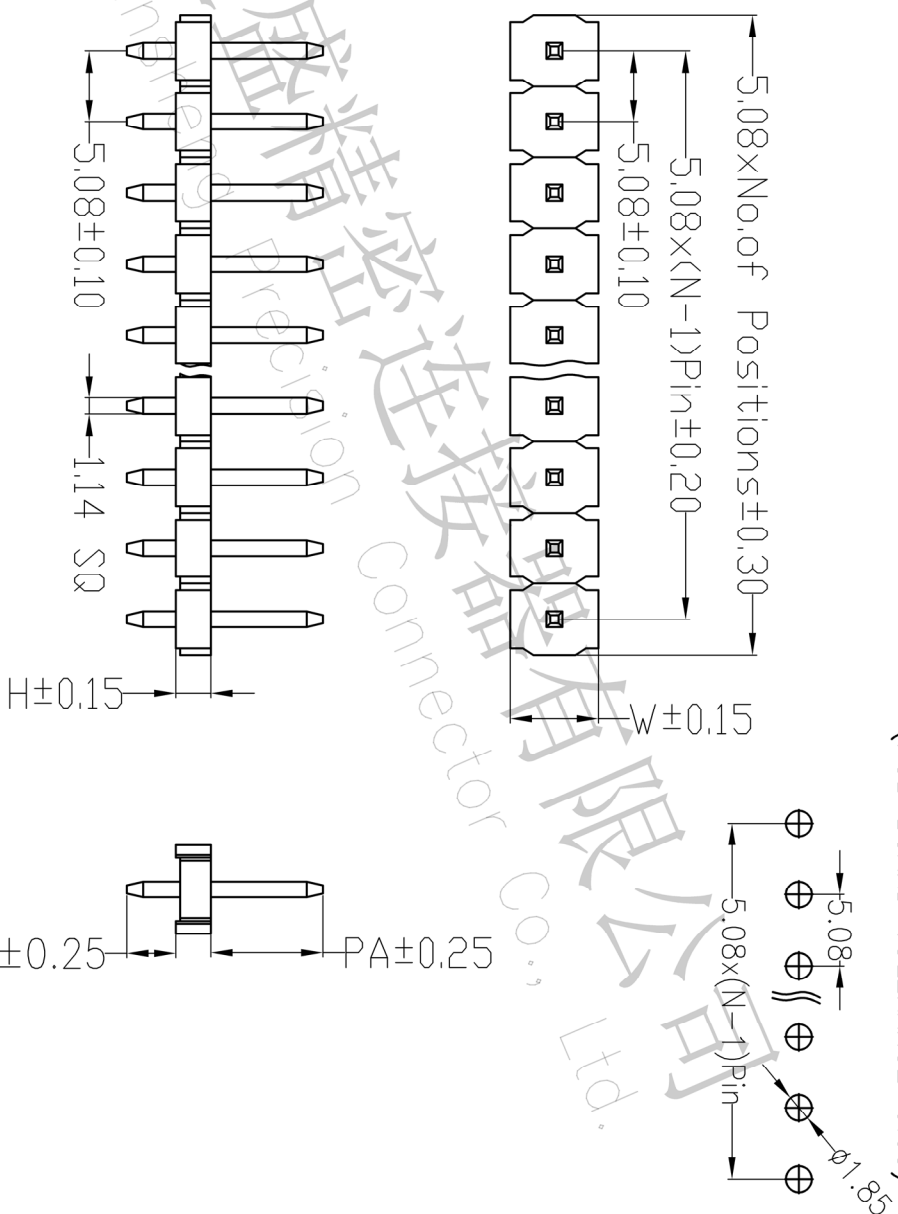

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

ITEM	PA	PB	PC	L1	L2	L3	H	W
001	8.00		3.50	14.0			2.5	6.3

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			5.08PH 1XNP 180度	
X.XX	±0.20	CHECK		SIZE	A4	SHEET		TITLE:	
X.XXX	±0.10			APPROVE		PROJ.			
Angle	±3°								
DIM	TOL								

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012.04.11	NEW DRAWING	