
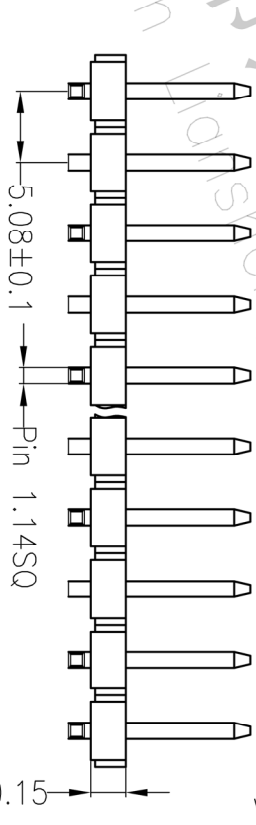
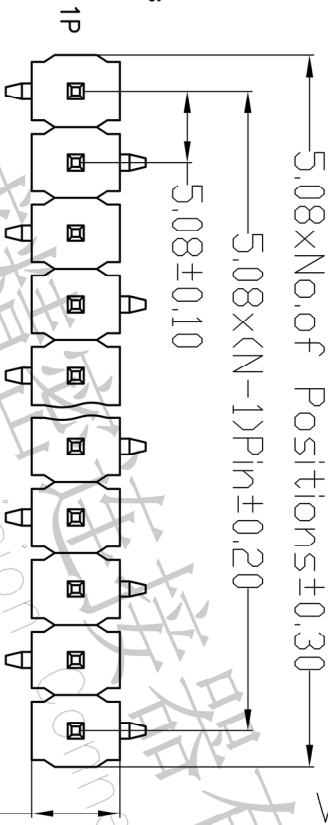


ROHS




SPECIFICATIONS

Rated Current: 5.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

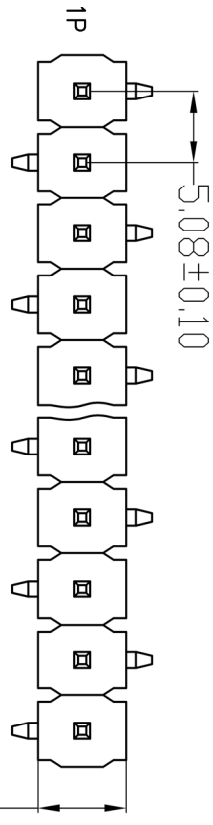

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

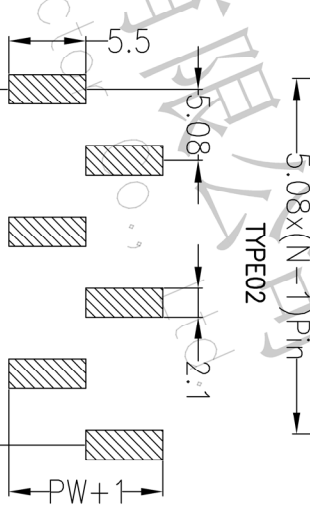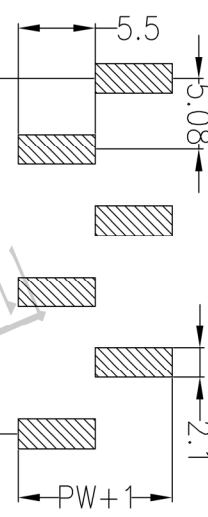

Ordering Information

P	X	X	X	XX	X	X	XX	X	XXXX
产品系列	插板间距	插板	有插板间距	产品系列	板厚	板宽	板长	板高	序列号
2=2.0	B=1.5	1=1.0	1=1.0	2=2.54	1=1.0	1=1.0	1=1.0	1=1.0	
3=2.54	C=2.0	2=1.5	2=1.5	3=3.18	2=1.5	2=1.5	2=1.5	2=1.5	
4=3.0	D=2.5	3=2.0	3=2.0	4=3.81	3=2.0	3=2.0	3=2.0	3=2.0	
5=3.81		4=2.5	4=2.5	5=4.75	4=2.5	4=2.5	4=2.5	4=2.5	
6=4.8				6=6.35	5=3.18	5=3.18	5=3.18	5=3.18	
7=4.8				7=7.62	6=4.0	6=4.0	6=4.0	6=4.0	
8=5.08				8=10.16	7=5.08	7=5.08	7=5.08	7=5.08	
9=5.08				9=12.7	8=6.35	8=6.35	8=6.35	8=6.35	

ITEM	PA	PB	PW	L1	L2	L3	H	W
001	8.00	4.10	10.0				2.5	6.3

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm				
X.XX	±0.20	CHECK		SIZE	A4	SHEET		1/1	
X.XXX	±0.10			ANGLE	±3°	PROJ.		1/1	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL	APPROVE		TITLE:	5.08P4 1XN1P SMT
1	2012.04.11	NEW DRAWING							