


ROHS

Materials
 Pin: Brass, machined, (H59-3)
 Plating: Gold plated: 1.25u"m/50u"m nickel, full gold
 Insulator body (black): PPS (UL94V-0)

Electrical
 Current rating: 2Amps/contact max.
 Contact resistance: 20mΩ
 Insulation resistance: 1000MΩ
 Operating voltage: 60 AC/DC

Mechanical
 Operating temperature: Gold plated: -55°C to +105°C
 (Continuous) -67"°H to +105"°H
 Tin plated: -40°C to +105°C
 Soldering temperature: 260°C, 10s max

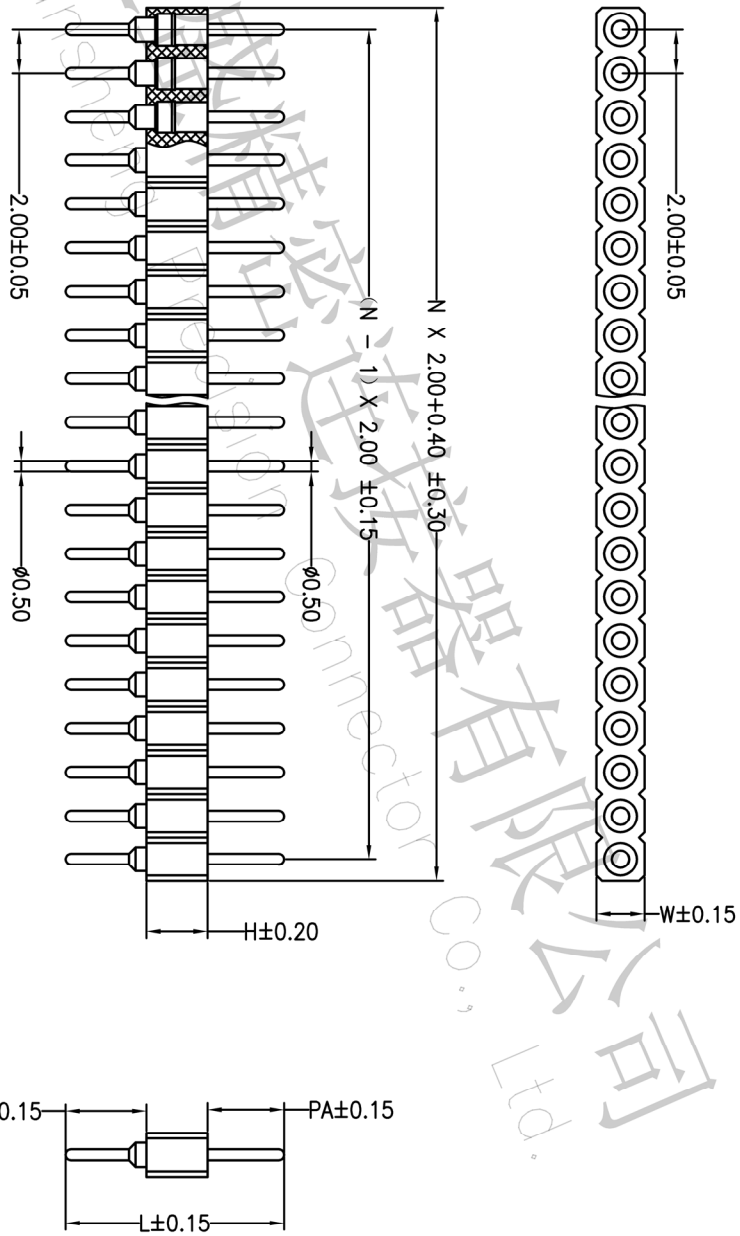

Ordering Information

P 200 11XX S X X G0 001

Type: P=Pin Header
 Pitch: 200=2.00
 No. of Pins: 11
 Per Row: 40P
 Connector Type: S=Straight
 Insulator Material: A=Black-PBT, B=Black-PA6T, C=Black-PA9T, D=Black-LCP, S=Special
 Packing Option: A=PE Bag, B=BOX, C=Tube, D=Tube+Cap, E=Reel+Cap, F=Reel+Mylar
 Contact Plating: G2=11U" Gold, G3=21U" Gold, G4=31U" Gold, G5=51U" Gold, S0=Gold Flash/Tin
 SN/Tin

Dimension orthitness list									
ITEM	PA	PB	PC	L1	L2	L3	H	W	
001	3.50		3.70	10.0			2.8	2.2	
Alternate									

深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			SIZE	A4
X.XX	±0.20	CHECK		SHEET		1.5/1		TITLE:	
X.XXX	±0.10			PROJ.				2.0PH H=2.8 1XNP L=10.0 180度	
Angle	±3°	APPROVE							
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION		CHANGE					
A0	2014.04.01	NEW DRAWING							
1									