
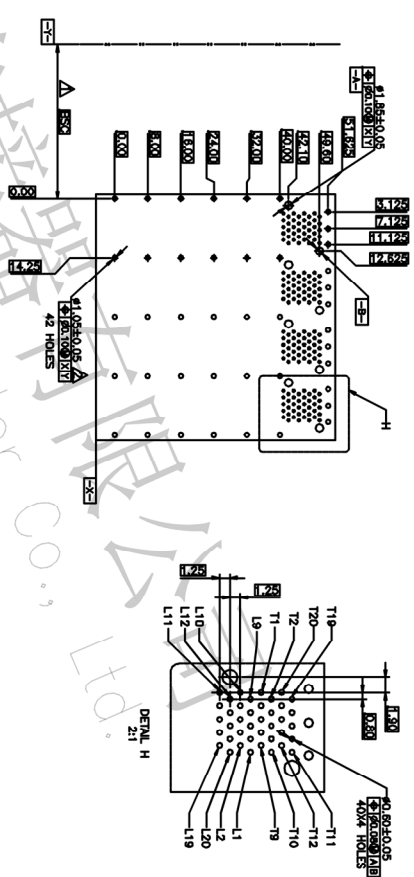
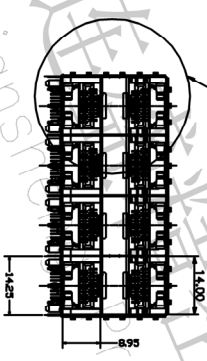
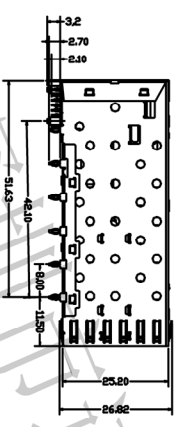




# ROHS

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

**MATERIAL:**  
GAGE: NICKEL SILVER THICKNESS 0.25mm  
LENGTH PIPE: POLYCARBONATE,COLOR:CLEAR.  
**CONNECTOR:**  
PLASTIC HOUSING:HIGH TEMPERATURE LCP UL94V-0.  
SPRING,STAINLESS STEEL THICKNESS 0.20mm  
CONTACTS,PHOSPHOR BRONZE,THICKNESS 0.20mm,  
PLATING:150<sup>um</sup> MIN.GOLD ON MATING AREA,  
1500<sup>um</sup> MIN. MATE TIN ON SOLDER TAILS.  
TEMPERATURE RANGE: -40 ~+85



**NOTES:**  
DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.  
1.05mm DIA METAL HOLES ARE CHASSIS GROUND(54 HOLES).



OPERATION		DRAW		SCALE		FIT	
X.X		±0.30		UNIT		mm	
X.XXX		±0.20		SIZE		A4	
X.XXX		±0.10		SHEET		1/1	
Angle		±3°		PROJ.		1	
DIM		TOL		PART NO.			
APPROVE				TITLE:			

**深圳市连盛精密连接器有限公司**  
Shenzhen Liansheng Precision Connector Co., Ltd.