

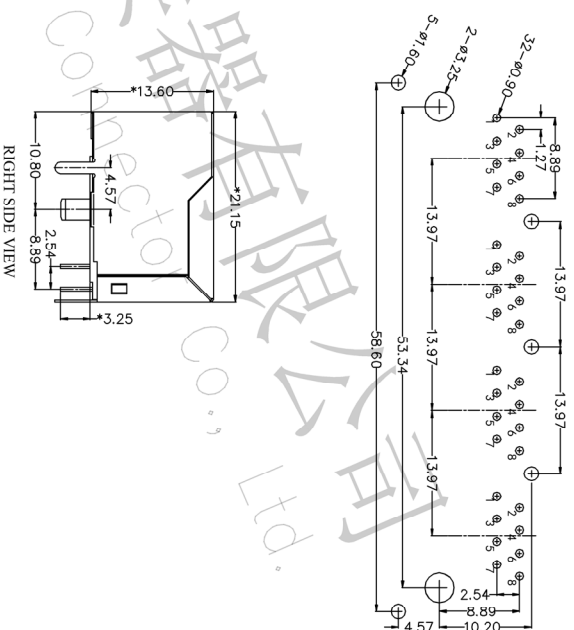
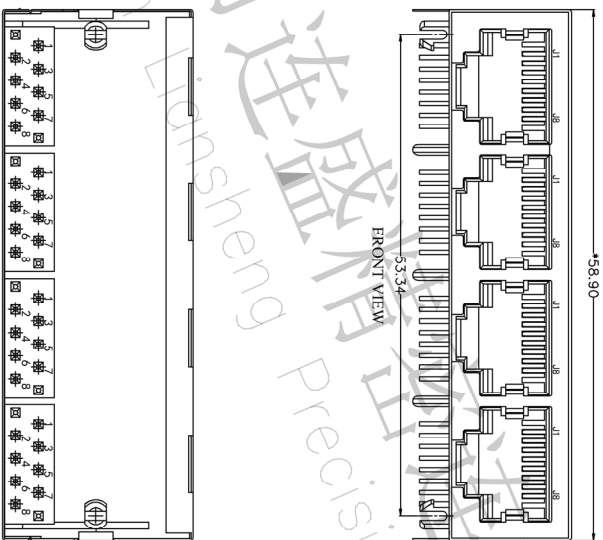


RoHS

MATERIAL:
 HOUSING: PBT,U194V-4,BLACK.
 TERMINAL: PHOSPHOR BRONZE Ø=0.46MM G/Fe" GOLD PLATING.
 SHIELD: C2580,T=0.20MM,20 MIN NICKEL PLATING
 ON ALL AREA.

MACHINICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: -40 ~ +85
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH ¹⁰⁰µm.

ELECTRICAL:
 VOLTAGE: 125 VOLTS AC.
 CURRENT RATING: 1.15AMP
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL.
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL: 30 MILLIOHMS MAX.
 INITIAL,50 MILLIOHMS MAX. AFTER
 DURABILITY TEST.



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
A0	2012.03.28	NEW DRAWING		X.X ±0.30	CHECK	mm	A4		RJ45 5921 1*4
1				X.XX ±0.20					
				X.XXX ±0.10					
				Angle ±3°	APPROVE				
				DIM					
				TOL					



Shenzhen Liansheng Precision Connector Co., Ltd.