

RoHS

MATERIAL:


R145: HOUSING: PBT, UL94V-0, BLACK.
 R145 TERMINAL: PHOSPHOR BRONZE T=0.35MM, G/F/U" GOLD PLATING.
 USB: HOUSING: PBT, UL94V-0, BLUE.
 R145 TERMINAL: PHOSPHOR BRONZE T=0.30MM, G/F/U" GOLD PLATING.
 SHIELD: SPCC.

MACHANICAL:

DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG. OPERATING
 TEMPERATURE: -40 ~ +85
 STORAGE TEMPERATURE: -40°C~+85°C.
 ALL CRITICAL DIMENSIONS WITH ¹⁴±0.1



ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
 CURRENT RATING: 1.5AMP.
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUTE.
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER
 DURABILITY TEST.

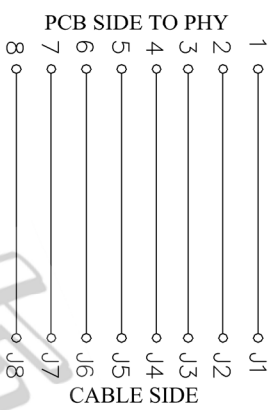

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V

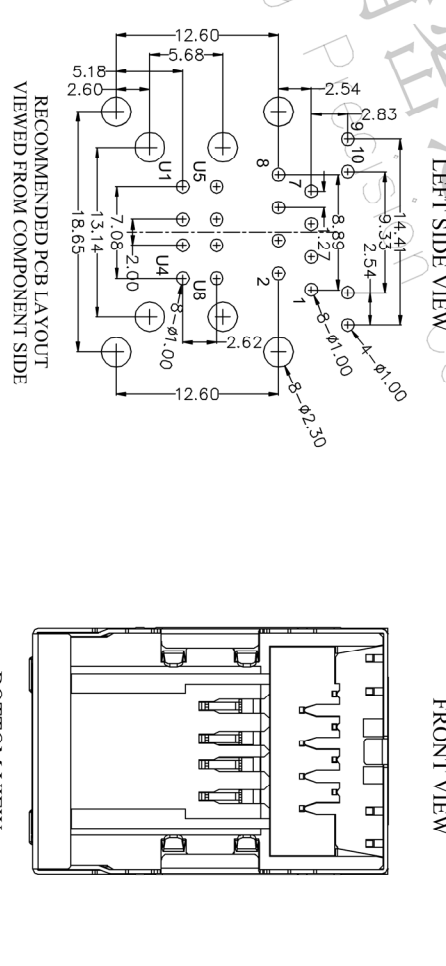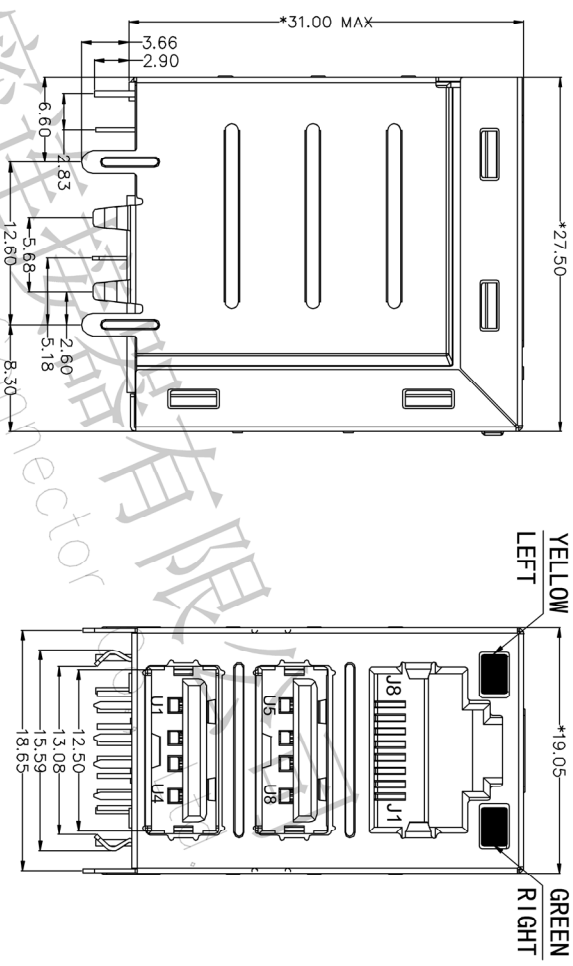

BOTTOM VIEW

OPERATION	DRAW	SCALE	FIT	TITLE:
X.X		UNIT	mm	PART NO. R145+ 双USB 2.0
X.XX	CHECK	SIZE	A4	
X.XXX		SHEET	1/1	TITLE: R145+ 双USB 2.0
Angle	APPROVE	PROJ.		
±3°				
DIM TOL				
CHANGE				
MODIFICATION DESCRIPTION				
DATE				
2012.03.28	NEW DRAWING			
REV				
A0				
A				

