RoHS

SPECIFICATIONS
1.MATERIAL:
Housig: LCP UL 94V-0
Color: Black
Contact: Phosphor bronze
Peg: Brass
2.FINISH:
Contact:3u" Gold/Tin platig on contact area
100u" min.Tin-Lead Plating on soldertails
50u" min.Nickel underplating over all
PEG: 100u"min.Tin-Lead plating on soldertails
50u"min.Nickel underplating over all

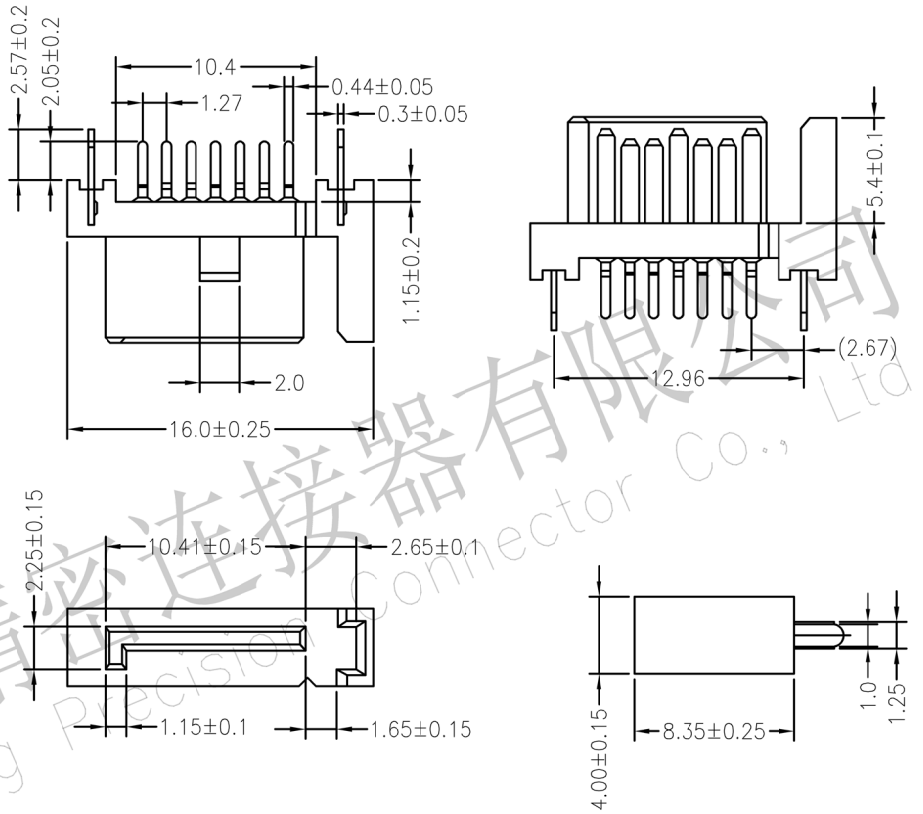

Ordering Information

S	G	07	X	X	X	G01	000
S=SATA	G=Mcle Header	07=7P	T=The harpoon G=Ground lug	S=Straight M=SMT	B=BOX C=TUBE D=TAPE REEL	G01=1UGold/Tin G03=3UGold/Tin G05=5UGold/Tin G010=10UGold/Tin G015=15UGold/Tin	

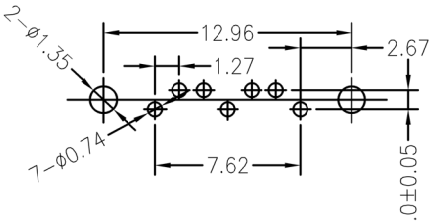

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.04.27	NEW DRAWING	

OPERATION		DRAW		
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3°	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

PART NO.	
TITLE:	**SATA7P A**型 单导柱 **PC2.05** 带接地片

深圳市连盛精密连接器有限公司 Shenzhen Liansheng Precision Connector Co., Ltd.