




# RoHS

## SPECIFICATIONS

1. MATERIAL:  
 Housing: LCP UL 94V-0  
 Color: Black  
 Contact: Phosphor bronze  
 Peg: Brass

2. FINISH:  
 Contact: Gold/Tin plating on contact area

100u" min. Tin-Lead Plating on soldertails  
 50u" min. Nickel underplating over all  
 PEG: 100u" min. Tin-Lead plating on soldertails  
 50u" min. Nickel underplating over all

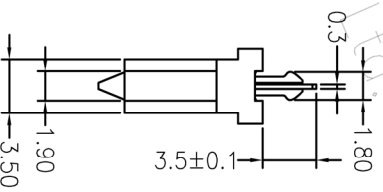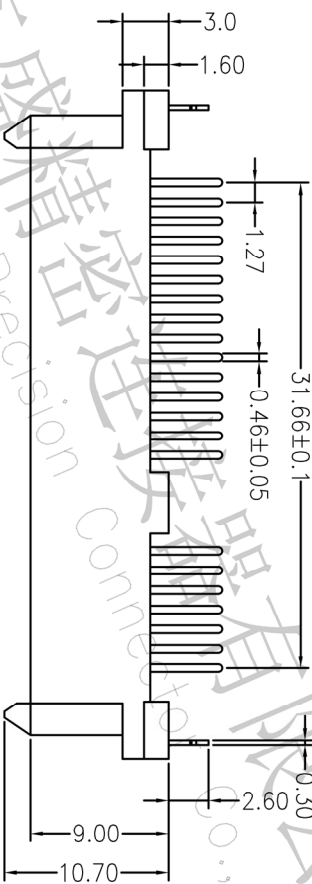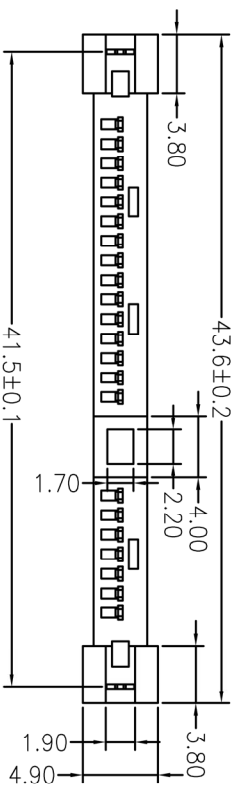

**Ordering Information**


S M 22 896 X X G01 000

S=SATA Header  
 M=Female Header  
 22=7+15P H=8.96

S=Straight  
 M=SMF

B=BOX  
 C=TUBE  
 D=IAPPE  
 REEL

G01=1UGold/Tin  
 G03=3UGold/Tin  
 G05=5UGold/Tin  
 G010=10UGold/Tin  
 G015=15UGold/Tin

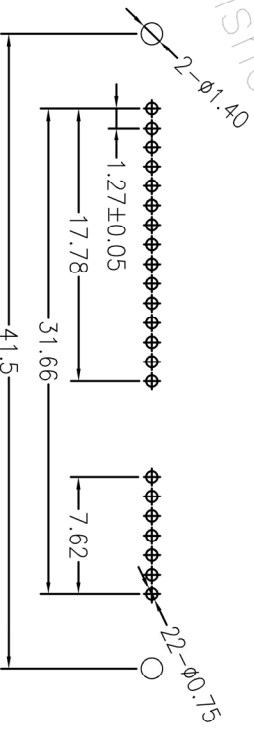

## PCB LAYOUT

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30			UNIT	mm			深圳市连盛精密连接器有限公司	
X.XX	±0.20	CHECK		SIZE	A4			Shenzhen Liansheng Precision Connector Co., Ltd.	
X.XXX	±0.10	APPROVE		SHEET	1/1			SATA7+15P 单排脚 180度 带鱼叉	
Angle	±3°			PROJ.	☑				
DIM	TOL								



深圳市连盛精密连接器有限公司  
 Shenzhen Liansheng Precision Connector Co., Ltd.

TITLE: **SATA7+15P 单排脚 180度 带鱼叉**