

RoHS



SPECIFICATIONS

1. MATERIAL:

Housing: LCP UL 94V-0
 Color: Black
 Contact: Phosphor bronze
 Peg: Brass

2. FINISH:

Contact: 3u" Gold/Tin plating on contact area
 100u" min. Tin-Lead Plating on soldertails
 50u" min. Nickel underplating over all
 PEG: 100u" min. Tin-Lead plating on soldertails
 50u" min. Nickel underplating over all

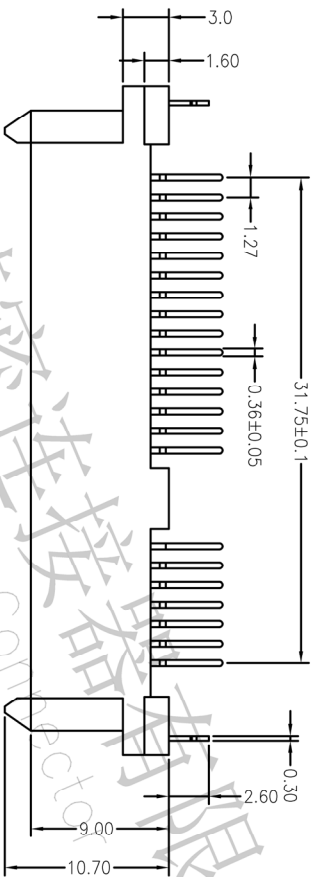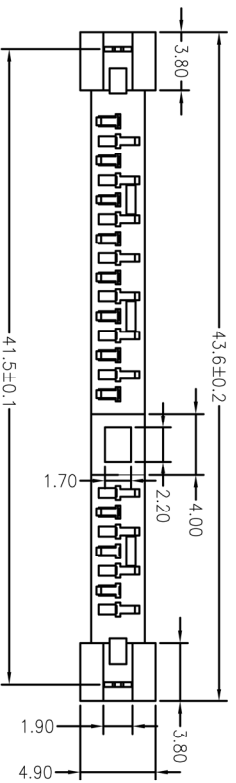

Ordering Information


S M 22 896 X X G01 000

S=SATA Header
 M=Female
 22=7+15P
 H=8.96

S=Strait
 M=SMT

B=BOX
 C=TUBE
 D=TAPE
 REEL

G01 = 1UGold/Tin
 G03 = 3UGold/Tin
 G05 = 5UGold/Tin
 G010 = 10UGold/Tin
 G015 = 15UGold/Tin

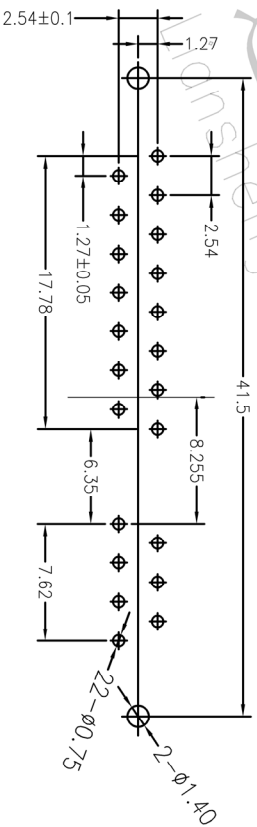

PCB LAYOUT



深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	X.XX	±0.20	UNIT	mm	SIZE	A4	SHEET	1/1
X.XXX	±0.10	Angle	±3°	APPROVE	PRD.	TITLE:			
A0	2014.04.27	NEW DRAWING							
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			
1		2		3			4	5	6
								7	8
									9

SATA7+15P 双排脚 180度 带鱼叉