

ROHS

- NOTES:
 1. MATERIAL:
 HOUSING: LCP WITH 30 % GLASS FIBER
 CONTENT, UL94 V-0
 COLOR: BLACK
 CONTACT: PHOSPHOR BRONZE C5191R H,T=0.30mm
 PEG: BRASS C2680R H,T=0.30mm
 2. FINISH:
 CONTACT: (1u"/3u", 5u", 15u") GOLD/TIN PLATING ON CONTACT AREA
 100u" MIN. TIN PLATING ON SOLDER TAILS
 50u" MIN. NICKEL UNDERPLATING OVER ALL

Ordering Information


S M 22 500 X X G01 000

S=SATA Header
 M=Female
 22=7+15P H=5.0


S=Straight
 M=SMT
 R=Right
 Angle

B=BOX
 C=TUBE
 D=TAPE
 REEL

G01=1UGold/Tm
 G03=3UGold/Tm
 G05=5UGold/Tm
 G010=10UGold/Tm
 G015=15UGold/Tm

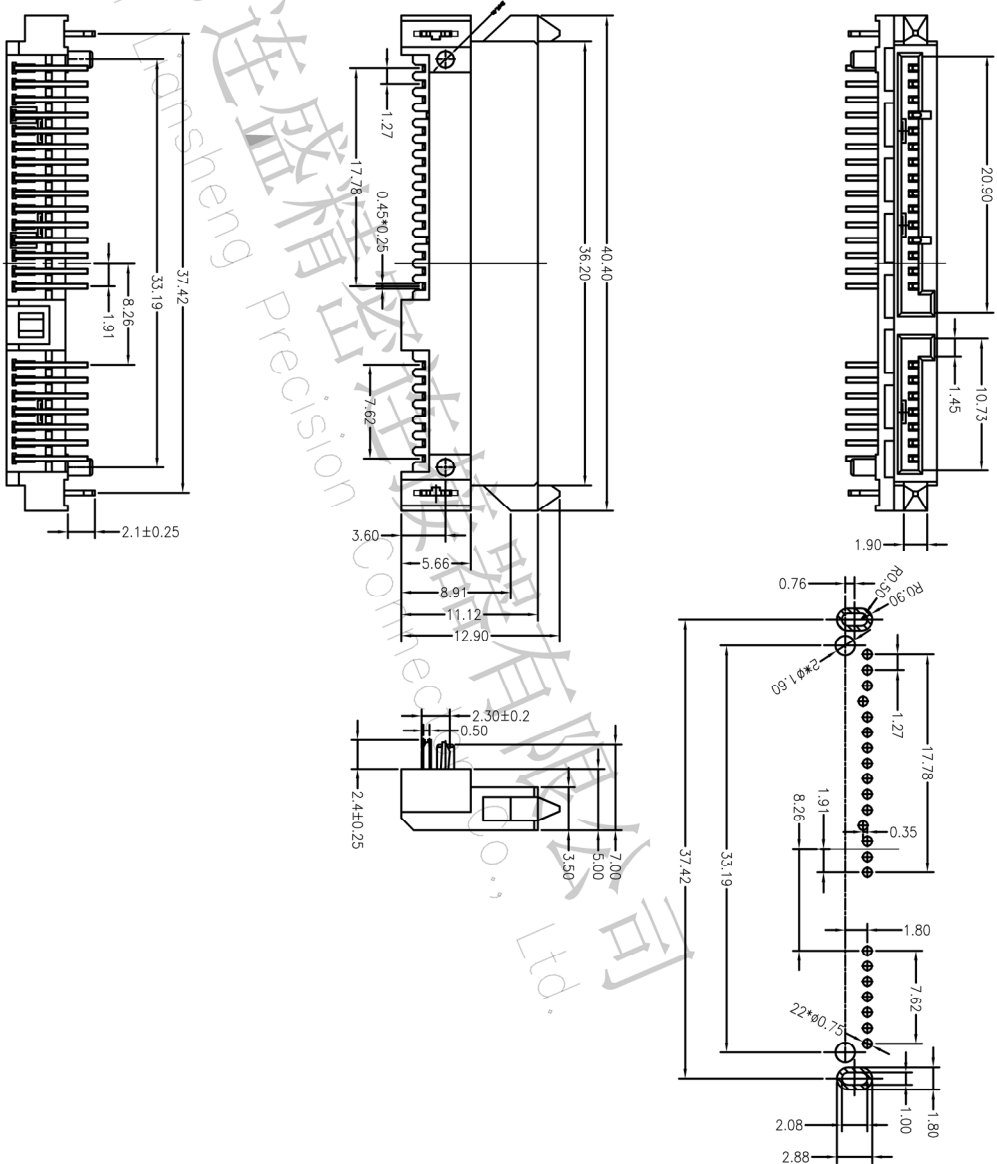

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

 深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		SCALE	FIT	PART NO.	TITLE:
				DRAW	CHECK				
A0	2014.04.27	NEW DRAWING		X.X	±0.30	mm	A4	1/1	SAT17+15P H5.0板上:90° PC2.4
1				X.XX	±0.20				
				X.XXX	±0.10				
				Angle	±3°				
				DIM	TOL				