
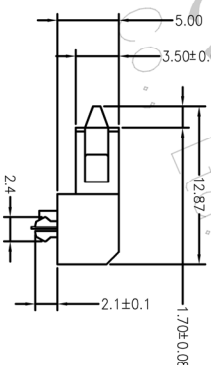
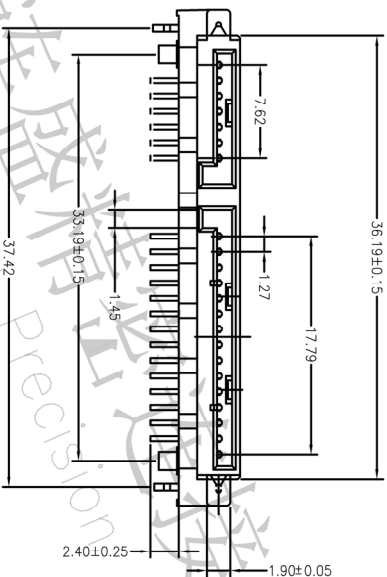
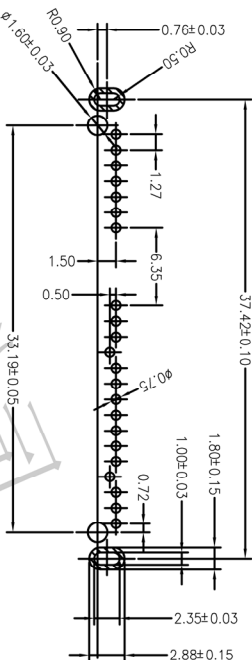


ROHS

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:

- 1.MATERIAL:
HOUSING: LCPWITH 30 % GLASS FIBER
CONTENT,UL94 V-0
- COLOR:BLACK
- CONTACT: PHOSPHOR BRONZE C5191R H₁T=0.30mm
- PEG:BRASS C2680R H₁T=0.30mm
- 2.FINISH:
CONTACT:(1u"/3u"5u",15u") GOLD/TIN PLATING ON CONTACT AREA
100u" MIN. TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL

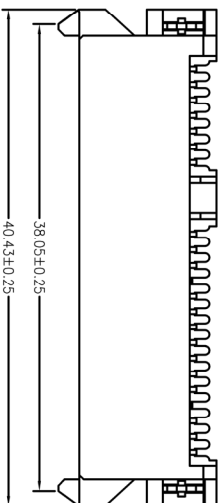


Ordering Information

S M 22 500 X X G01 000

S=SATA M=Female 22=7+15P H=5.0 Header

S=Straight B=BOX G01=1UGold/Tin
M=SMT C=TUBE G03=3UGold/Tin
R=Right D=TAPE G05=5UGold/Tin
Angle REEL G010=10UGold/Tin
G015=15UGold/Tin

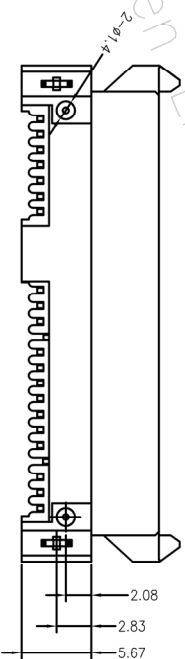

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:
A0	2014.04.27	NEW DRAWING		X.X ±0.30	CHECK	UNIT mm	A4		
1				X.XX ±0.20		SIZE A4			
				X.XXX ±0.10	APPROVE	SHEET 1/1			
				Angle ±3°		PROD.			
				DIM					
				TOL					



深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

SATA7+15P H5.0板下90° PC2.4