

1

2

3

4

5

6

7

8

9



RoHS

MATERIALS

Housing: Plastic Thermoplastic, PA6T, UL94V-0, Black
Contact Material: Copper Alloy Gold Selective Plated
Front Shell: Steel, Nickel Plated Over Copper
RoHS Compliant

ELECTRICAL CHARACTERISTICS


Rated Current: 1.0AMP
Withstand Voltage: 500V AC/DC
Insulation Resistance: 500MΩ Min
Contact Resistance: 35mΩ Max
Operation Temperature: -55℃ to +105℃

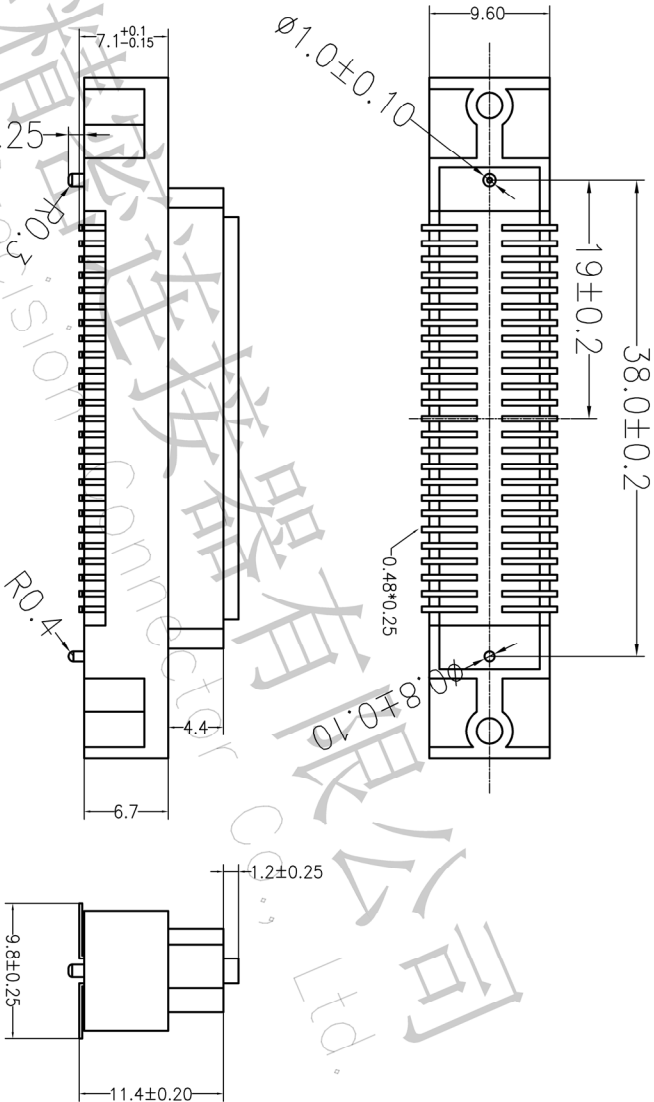

Ordering Information

6300 M 225 M X X X 001

M=Male
No. of Pins Per Row 2X25P
Connector Type S=Straight R=Right Angle M=SMT Z=贴脚 W=焊松脚
Insulator Option A=BK-PBT B=BK-PA6T C=BK-PA6T D=BK-LCP S=Special
Material
Packing A=PE Bog B=EOX C=tube D=tube+Cap E=Reel+Cap F=Reel+Mylar
Contact Plating G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold SN:Tin

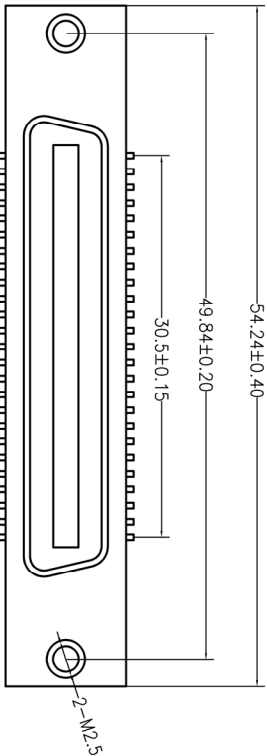

深圳市连盛精密连接器有限公司

Shenzhen Liansheng Precision Connector Co., Ltd.

PART NO.

信号连接器公座 SMT 带大小柱 胶芯加高1.2

REV DATE

MODIFICATION DESCRIPTION

CHANGE

OPERATION
X.X ±0.30
X.XX ±0.15
X.XXX ±0.10
Angle ±3°
DIM TOL

DRAW
CHECK
APPROVE

SCALE FIT
UNIT mm
SIZE A4
SHEET 1/1
PROD.

TITLE:

信号连接器公座 SMT 带大小柱 胶芯加高1.2