


RoHS

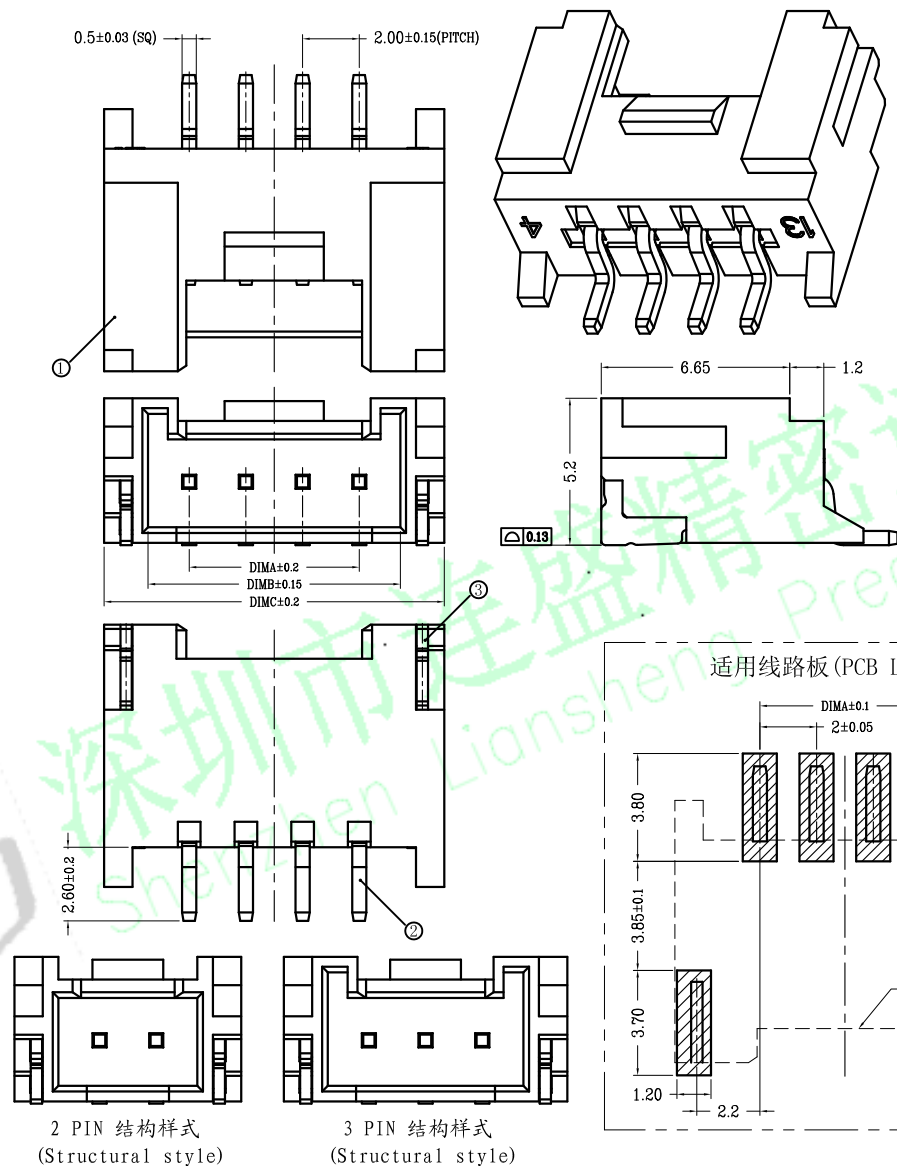

技术指标 (Technical Index):


1. 温度范围 (Temperature range): $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$.
2. 额定电压 (Rated voltage): 200V, AC.
3. 额定电流 (Rated Current): 2A AC/DC
4. 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$
5. 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.
6. 产品料号 (Product material No.):

序号 (NO.)	品名 (Name)	材质 (Material)
①	2.00 F型卧式2代WTB胶芯 2.00 Pitch R/A Wire To Board Housing (H=5.2)	LCP UL94V-0 本色 Natural
②	2.00 F型卧式2代WTB端子 2.00 Pitch R/A Wire To Board Terminal (H=5.2)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	2.00 F型卧式WTB焊片 2.00 Pitch R/A Wire To Board Fitting Nail (H=5.6)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

CKT	DIM A	DIM B	DIM C
2	2.00	4.90	8.00
3	4.00	6.90	10.00
4	6.00	8.90	12.00
5	8.00	10.90	14.00
6	10.00	12.90	16.00
7	12.00	14.90	18.00
8	14.00	16.90	20.00
9	16.00	18.90	22.00
10	18.00	20.90	24.00
11	20.00	22.90	26.00
12	22.00	24.90	28.00
13	24.00	26.90	30.00
14	26.00	28.90	32.00
15	28.00	30.90	34.00
16	30.00	32.90	36.00
17	32.00	34.90	38.00
18	34.00	36.90	40.00
19	36.00	38.90	42.00
20	38.00	40.90	44.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			
2			
3			
4			

OPERATION		DRAW	黄喜俊	SCALE	FIT
X.X	±0.30				
X.XX	±0.20	CHECK	卢能	UNIT	mm
X.XXX	±0.10			SIZE	A4
Angle	±3'	APPROVE	李双	SHEET	1/1
DIM	TOL			PROJ.	☐


深圳市连盛精密连接器有限公司
 Shenzhen Liansheng Precision Connector Co., Ltd.

PART NO.:
 TITLE: **HY-1*NP AWR**