


RoHS

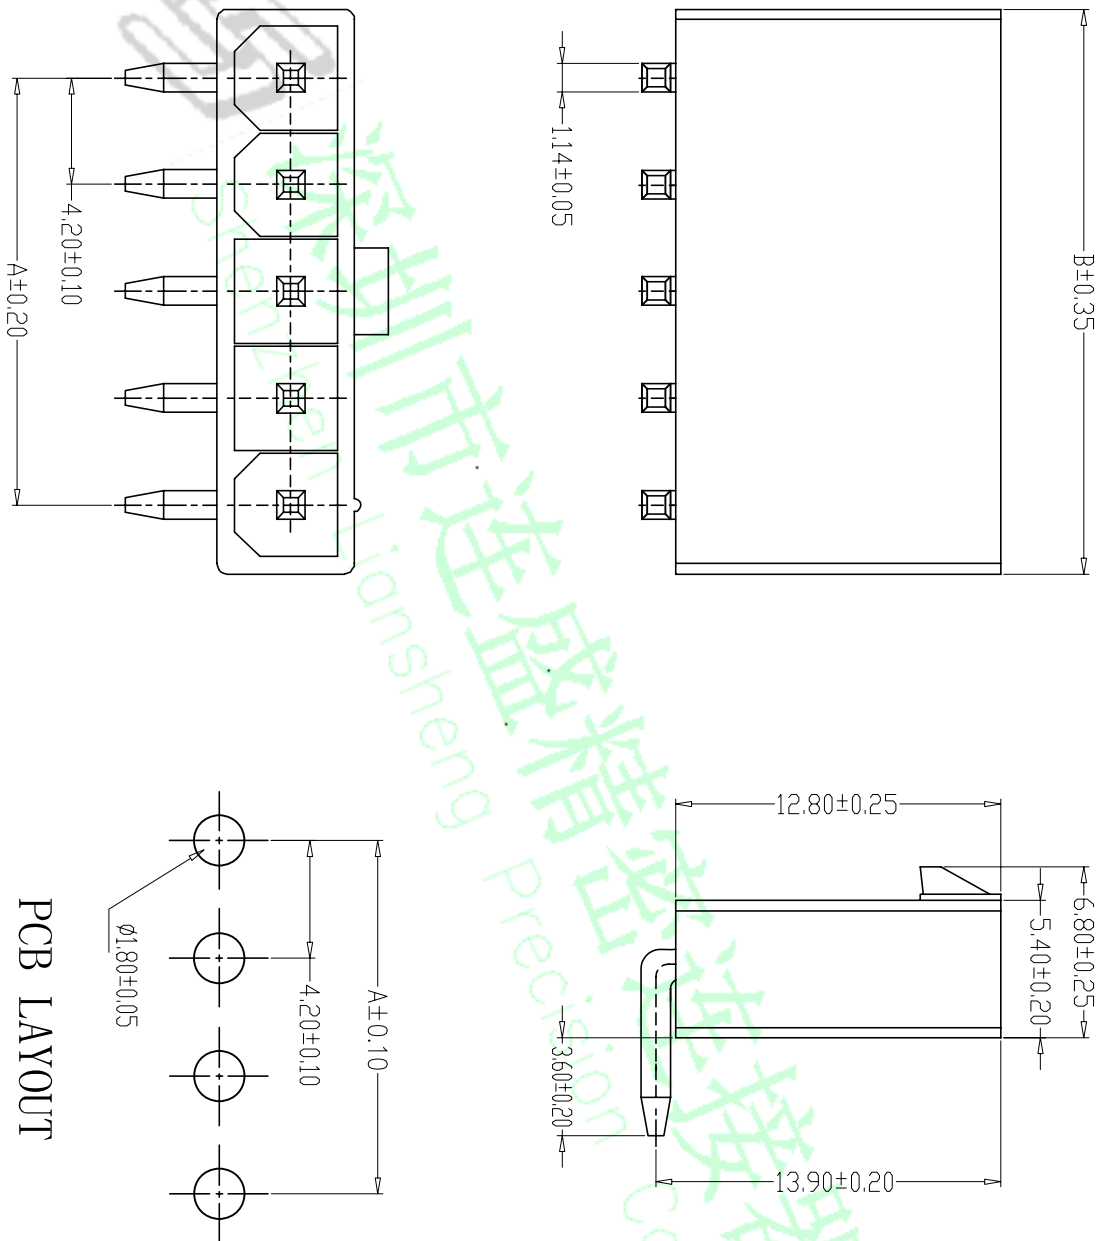

PCB LAYOUT

- SPECIFICATIONS
- 1、Current Rating: 9A AC, DC
 - 2、Voltage Rating: 600V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltage: 1500V AC/minute
 - 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编号	尺寸 (mm)	
	A	B
5569-2AW	4.20	9.60
5569-3AW	8.40	13.80
5569-4AW	12.60	18.00
5569-5AW	16.80	22.20

OPERATION		DRAW		SCALE	
X.X	±0.30	黄喜俊	UNIT	FIT	
X.XX	±0.20	CHECK	SIZE	A4	
X.XXX	±0.10	卢能	SHEET	1/1	
Angle	±3°	APPROVE	PROJ.		
DIM	TOL	李双			

 深圳市连盛精密连接器有限公司
Shenzhen Liansheng Precision Connector Co., Ltd.

PART NO.	5569-NAW
TITLE:	5569-NAW

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1			
2			
3			
4			

OPERATION	DRAW	SCALE
X.X	黄喜俊	FIT
X.XX	CHECK	UNIT
X.XXX	卢能	SIZE
Angle	APPROVE	SHEET
DIM	李双	PROJ.

PART NO.	5569-NAW
TITLE:	5569-NAW